



Description

The new range of the AREX Eco² HE Fixtures aims to replace the traditional T8 and T5 fixtures with one or two lamps.

Color temperature tolerance of 3 SDCM MacAdam ellipses, defined by ANSI C78.377:2008

Energy Efficiency Class: A++ in clear polycarbonate and A+ in frost polycarbonate.

Above 50% of predicted savings.

Different design possibilities.

Option with DALI communication system.

Don't send ultraviolet or infrared radiation and is a friendly eco lamp because it's repairable and don't contains mercury, neither other dangerous substance.

Technical Features:

Power source	198 to 264V AC 50/60Hz (Class I constant current internal power supply)
Power	22 ± 1W
Power Factor	> 0.95
LED Current	660 mA
LED Voltage	29.5 ± 3 V DC
Useful Lifetime	60.000 hours (L70 - 85°C @ 65%H) *
Beam Angle	Clear: 120 ± 5° **
Field Angle	Clear: 125 ± 5° **
Nr. of LEDs	110 - SMD
Weight	2.6 Kg
Working Temp.	-20 to 40 °C
Tc	55°C (maximum case temperature)
Lumen maintenance	LM80 (Report available: LM-80 9000hrs)
Certificate	CE / RoHs
Isolation	Class I

*Luminosity depreciation based on L70.

**Beam angle: 50% of maximum lum.

***Field angle: 10% of maximum lum.

Light Technical Data:


Reference	Description	Lum. flux (Lm)*	Eff. (Lm/W)	Color Temp. (K)**	Color	CRI >	Lens type
36137532131 XXYYZZ	LLED AREX 1375 WW303 HE Eco ² Clear	2168	99	3045 ±84	Warm	80	Clear
36137534131 XXYYZZ	LLED AREX 1375 NW403 HE Eco ² Clear	2269	103	3986 ±144	Neutral	80	Clear
36137536131 XXYYZZ	LLED AREX 1375 CW573 HE Eco ² Clear	2269	103	5668 ±207	Cool	80	Clear
36137532132 XXYYZZ	LLED AREX 1375 WW303 HE Eco ² Frost	1617	74	3045 ±84	Warm	80	Frost
36137534132 XXYYZZ	LLED AREX 1375 NW403 HE Eco ² Frost	1692	77	3986 ±144	Neutral	80	Frost
36137536132 XXYYZZ	LLED AREX 1375 CW573 HE Eco ² Frost	1692	77	5668 ±207	Cool	80	Frost

* Luminous flux ± 7.5%

* Other color temperatures available upon request




Dimensions

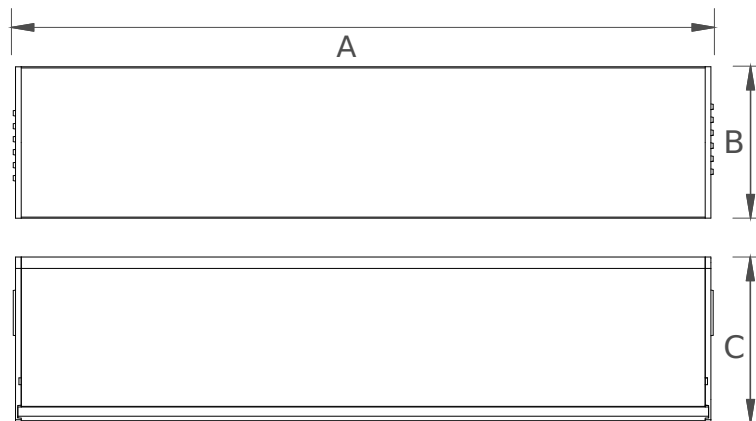


A (mm)	B (mm)	C (mm)
1384	74	66

Photometric Data


HE LED warm white 3000K 3SDCM

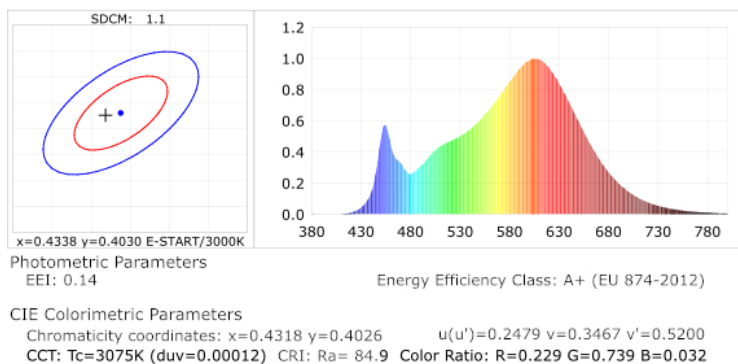


Warm white 3000K 3SDCM

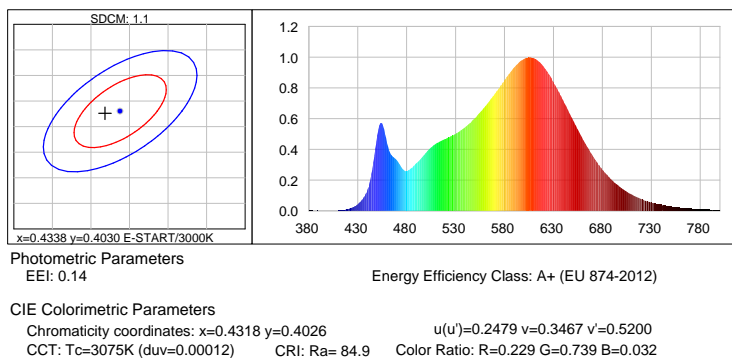

Neutral white 4000K 3SDCM

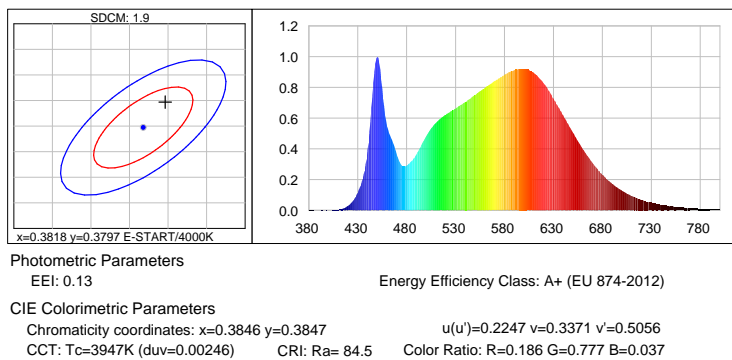


Cool white 5700K 3SDCM

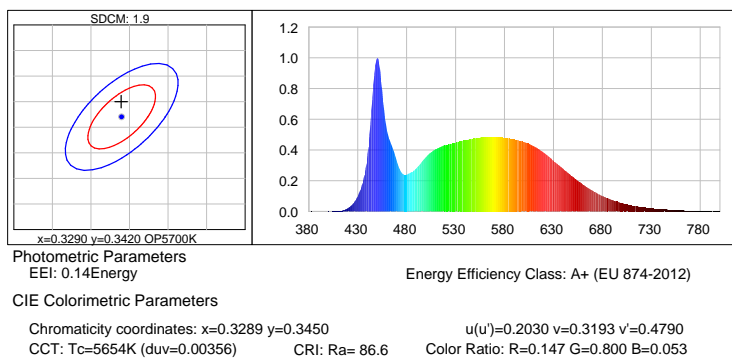

Options

Cover type

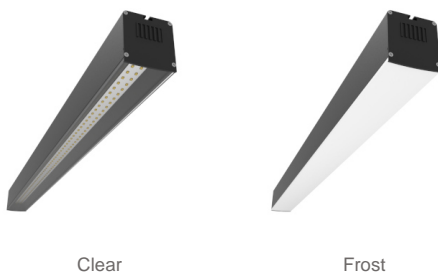

XXYYZZ - The last six digits are additional options.

XX - Fixture body finishing.



Natural Aluminum
XX=01





White Aluminum
XX=02





Black Aluminum
XX=04

Accessories option


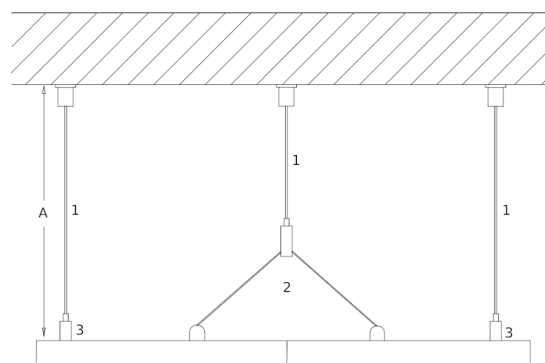
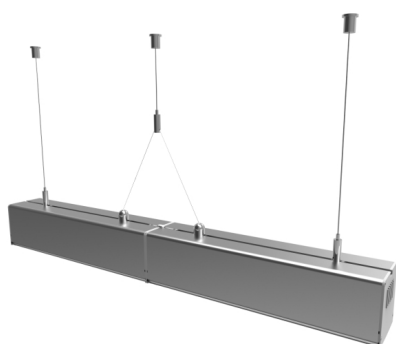


- [1] - Steel Cable Cod: [A] 200cm:8400035143 || [A] 300cm:8400035144
[2] - Double terminal for steel cable(2xM5/6 with base) Cod:8400035141
[3] - Terminal(M5/6 with Base) Cod:8400035140

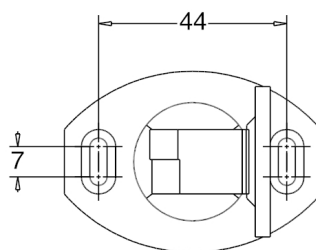

Unit of measurement: mm
Holder

Cod: Grey:8400037202 White:8400037102 Black:8400037302

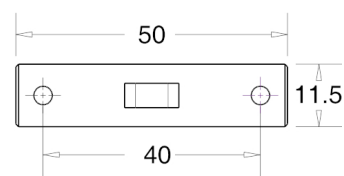

Unit of measurement: mm

Arex Union

Cod: Grey:8400037205 White:8400037105 Black:8400037305