

Description



The LED bar is intended to create a new lighting concept and greatly reduce energy consumption. Color temperature tolerance of 3 SDCM MacAdam ellipse, according to ANSI C78.377: 2011.

A+ Energy class.

The LEDs meet the Eye safety standard EN62471 classified in RG-1.

The polycarbonate bar lens Trirex 3030IR, meets the food safety standards for FDA 21CFR 177.1580 and the European standard (EU) No. 10/2011.

A great flexibility of sizes, (10cm to 225cm) allows to adapt the sizes and luminosity to each project.

With easy installation, allows the use of individual bars for each of the sizes and or join several bars in a continuous line so that the space is suitably illuminated.

Technical Features:

Power source	Class II constant voltage external LED drive power supply
Voltage	24 ± 3 V DC
Current	714 mA
Power	17 ± 0.5 W
Useful Lifetime	60.000 hours (L70 - 55°C @ 65%H) *
Beam angle	120 ± 5° **
Field angle	Clear: 135 ± 5° Frost: 195 ± 5° ***
Nr of LEDs	204 - SMD
Working Temp.	-20 to 40 °C
Isolation	Class III
Protection degree	IP42
Lumen maintenance	LM80 (Report available: LM-80 9000hrs)
Certificate	CE / RoHs

*Luminosity depreciation based on L70.
 **Beam angle: 50% of maximum lum.
 ***Field angle: 10% of maximum lum.


Light Technical Data:

Reference	Description	Lum. flux (Lm)*	Eff. (Lm/W)	Color Temp. (K)**	Color	CRI >	Lens type
11127532111 XXYYZZ	LLED Barra 24V 130 WW303 HE Clear	2091	123	3045 ± 84	Warm	80	Clear
11127534111 XXYYZZ	LLED Barra 24V 130 NW403 HE Clear	2187	129	3986 ± 144	Neutral	80	Clear
11127524111 XXYYZZ	LLED Barra 24V 130 NW403 Clear	2087	123	3986 ± 144	Neutral	80	Clear
11127525111 XXYYZZ	LLED Barra 24V 130 CW503 Clear	2087	123	5029 ± 186	Cool	80	Clear
11127536111 XXYYZZ	LLED Barra 24V 130 CW573 HE Clear	2187	129	5668 ± 207	Cool	80	Clear
11127527111 XXYYZZ	LLED Barra 24V 130 CW653 Clear	2087	123	6536 ± 279	Cool	80	Clear
11127532112 XXYYZZ	LLED Barra 24V 130 WW303 HE Frost	1795	106	3045 ± 84	Warm	80	Frost
11127534112 XXYYZZ	LLED Barra 24V 130 NW403 HE Frost	1878	110	3986 ± 144	Neutral	80	Frost
11127524112 XXYYZZ	LLED Barra 24V 130 NW403 Frost	1707	100	3986 ± 144	Neutral	80	Frost
11127525112 XXYYZZ	LLED Barra 24V 130 CW503 Frost	1707	100	5029 ± 186	Cool	80	Frost
11127536112 XXYYZZ	LLED Barra 24V 130 CW573 HE Frost	1878	110	5668 ± 207	Cool	80	Frost
11127527112 XXYYZZ	LLED Barra 24V 130 CW653 Frost	1707	100	6536 ± 279	Cool	80	Frost

* Luminous flux ± 7.5%
 * Other color temperatures available upon request




Dimensions

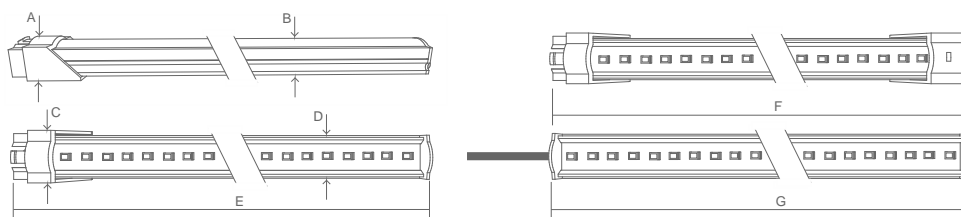

A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
15	12	20	17	1294	1310	1279

Photometric Data

Warm white 3000K 3SDCM

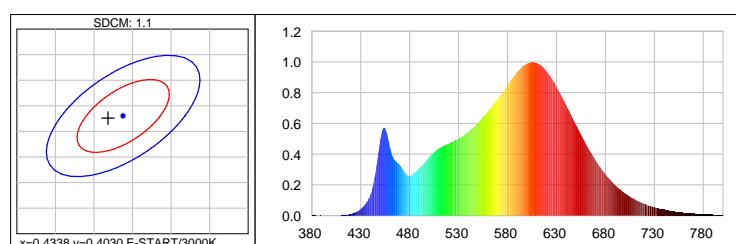


Photometric Parameters
EEL: 0.14

Energy Efficiency Class: A+ (EU 874-2012)

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4318$ $y=0.4026$ $u(u')=0.2479$ $v=0.3467$ $v'=0.5200$
CCT: $T_c=3075K$ ($duv=0.00012$) CRI: $R_a=84.9$ Color Ratio: $R=0.229$ $G=0.739$ $B=0.032$

Neutral white 4000K 3SDCM

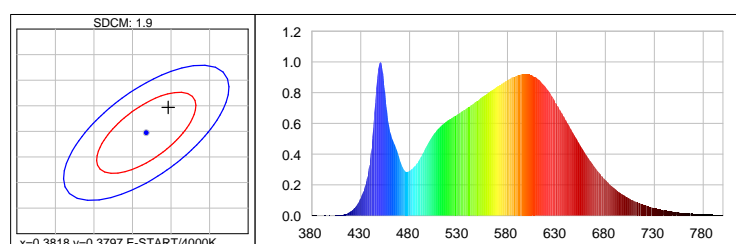


Photometric Parameters
EEL: 0.13

Energy Efficiency Class: A+ (EU 874-2012)

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3846$ $y=0.3847$ $u(u')=0.2247$ $v=0.3371$ $v'=0.5056$
CCT: $T_c=3947K$ ($duv=0.00246$) CRI: $R_a=84.5$ Color Ratio: $R=0.186$ $G=0.777$ $B=0.037$

Cool white 5000K 3SDCM

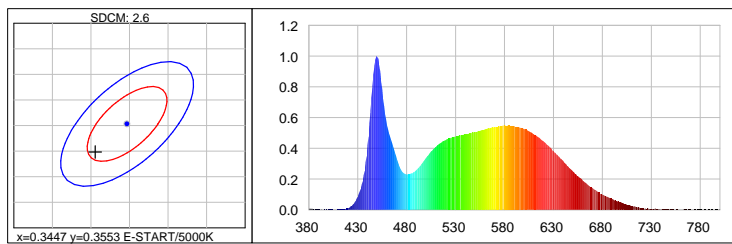

Photometric Parameters


EEL: 0.15 Energy Efficiency Class: A+ (EU 874-2012)

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3406$ $y=0.3498$ $u(u')=0.2090$ $v=0.3221$ $v'=0.4831$

CCT: $T_c=5172K$ ($duv=0.00096$) CRI: $R_a=85.4$ Color Ratio: $R=0.156$ $G=0.797$ $B=0.047$

Cool white 5700K 3SDCM

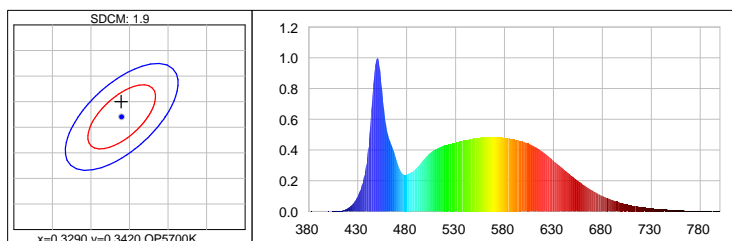

Photometric Parameters

EEL: 0.14

Energy Efficiency Class: A+ (EU 874-2012)


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3289$ $y=0.3450$

$u(u')=0.2030$ $v=0.3193$ $v'=0.4790$

CCT: $T_c=5654K$ ($duv=0.00356$) CRI: $R_a=86.6$ Color Ratio: $R=0.147$ $G=0.800$ $B=0.053$

Cool white 6500K 3SDCM

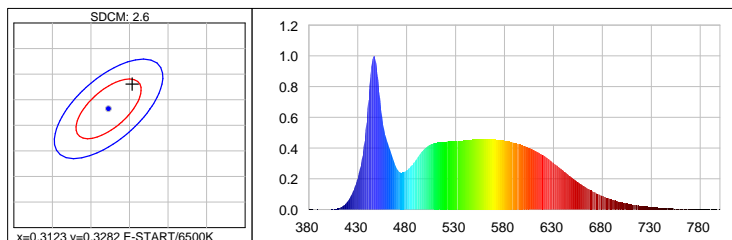

Photometric Parameters

EEL: 0.15

Energy Efficiency Class: A+ (EU 874-2012)


CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.3154$ $y=0.3330$ $u(u')=0.1982$ $v=0.3139$ $v'=0.4709$

CCT: $T_c=6338K$ ($duv=0.00393$) CRI: $R_a=87.4$ Color Ratio: $R=0.140$ $G=0.803$ $B=0.057$

Options

Cover type






Clear






Frost

XXYYZZ - The last six digits are additional options.


XX - Bar body finishing.


Natural Aluminum
XX=01

White Aluminum
XX=02

Brown Aluminum
XX=03

Polycarbonate
XX=81


YY - Bar connection.


Top Input cable
YY=01

Male connector input - 1C2P
YY=04

Male connector input female connector output -
2C2P
YY=06

Top Input cable output connector - 1C2P+STopo
YY=08


ZZ - Cable type.




Without connector
ZZ=00



ASQC2 Connector
ZZ=27






DCJ Connector
ZZ=41






DC24 Connector
ZZ=46



Fixture option





Unit of measurement: mm
180° CLIP W/ 45° BASE Cod: 8400035115





Unit of measurement: mm
180 ° FIX CLIP Cod: 8400035111





Unit of measurement: mm
45 ° FIX CLIP Cod: 8400035112





Unit of measurement: mm
ROTATING CLIP Cod: 8400035114





Unit of measurement: mm
180 ° PVC SUPPORT
TYPE: 180°




Unit of measurement: mm
180 ° PVC SUPPORT SILICONE CAP WHITHOUT HOLE
COLOR CODES AVAILABLE: BR: 8400033071 || CZ: 8400033081





Unit of measurement: mm
180 ° PVC SUPPORT SILICONE CAP WITH HOLE
COLOR CODES AVAILABLE: BR: 8400033072 || CZ: 8400033082





Unit of measurement: mm
45 ° PVC SUPPORT
TYPE: 45°

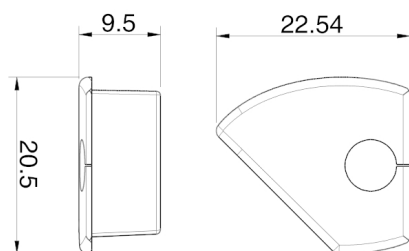


Unit of measurement: mm
45 ° PVC SUPPORT SILICONE CAP WITH HOLE
COLOR CODES AVAIALE: BR Right: 8400033076 || CZ Right: 8400033086 || BR Left: 8400033075 || CZ Left: 8400033085






Unit of measurement: mm
CORNER PVC SUPPORT
TYPE: CORNER






Unit of measurement: mm
CORNER PVC SUPPORT SILICONE CAP
COLOR CODES AVAIALE: BR: 8400033073 || CZ: 8400033083



Unit of measurement: mm
CORNER PVC SUPPORT SILICONE CAP
COLOR CODES AVAILABLE: BR: 8400033074 || CZ: 8400033084



Unit of measurement: mm
180° FIXATION CLIP - POLYCARBONATE Cod: 8400035117

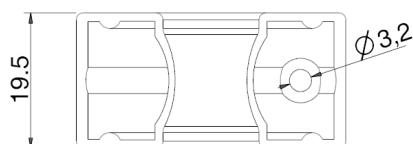

Unit of measurement: mm
FIXATION SUPPORT - POLYCARBONATE Cod: 8400035119