



Description

The new range of the AREX HE Fixtures aims to replace the traditional T8 and T5 fixtures with one or two lamps.

Color temperature tolerance of 3 SDCM MacAdam ellipses, defined by ANSI C78.377:2008

Energy Efficiency Class: A++ in clear polycarbonate and A+ in frost polycarbonate.

Above 50% of predicted savings.

Different design possibilities.

Option with DALI communication system.

Don't send ultraviolet or infrared radiation and is a friendly eco lamp because it's repairable and don't contains mercury, neither other dangerous substance.

Technical Features:

Power source	198 to 264V AC 50/60Hz (Class I constant current internal power supply)
Power	40 ± 2W
Power Factor	> 0.95
LED Current	1220 mA
LED Voltage	29.5 ± 3 V DC
Useful Lifetime	60.000 hours (L70 - 85°C @ 65%H) *
Beam Angle	Clear: 105 ± 5° Frost: 115 ± 5°**
Field Angle	Clear: 130 ± 5° Frost: 165 ± 5° ***
Nr. of LEDs	240 - SMD
Weight	2.1 Kg
Working Temp.	-20 to 40 °C
Tc	55°C (maximum case temperature)
Lumen maintenance	LM80 (Report available: LM-80 9000hrs)
Certificate	CE / RoHs
Isolation	Class I

*Luminosity depreciation based on L70.

**Beam angle: 50% of maximum lum.

***Field angle: 10% of maximum lum.

Light Technical Data:


Reference	Description	Lum. flux (Lm)*	Eff. (Lm/W)	Color Temp. (K)**	Color	CRI >	Lens type
36100032111 XXYYZZ	LLED AREX 1000 WW303 HE Clear	4008	100	3045 ±84	Warm	80	Clear
36100034111 XXYYZZ	LLED AREX 1000 NW403 HE Clear	4193	105	3986 ±144	Neutral	80	Clear
36100036111 XXYYZZ	LLED AREX 1000 CW573 HE Clear	4193	105	5668 ±207	Cool	80	Clear
36100032112 XXYYZZ	LLED AREX 1000 WW303 HE Frost	2990	75	3045 ±84	Warm	80	Frost
36100034112 XXYYZZ	LLED AREX 1000 NW403 HE Frost	3128	78	3986 ±144	Neutral	80	Frost
36100036112 XXYYZZ	LLED AREX 1000 CW573 HE Frost	3128	78	5668 ±207	Cool	80	Frost

* Luminous flux ± 7.5%

** Other color temperatures available upon request



Dimensions

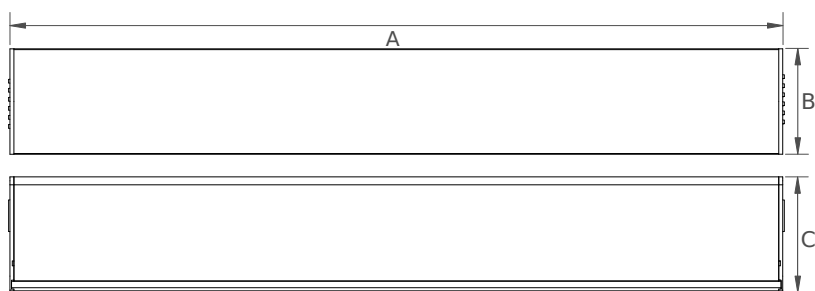

A (mm)	B (mm)	C (mm)
1008	74	66

Options

Cover type



Clear



Frost

XXYYZZ - The last six digits are additional options.



XX - Fixture body finishing.


Natural Aluminum
XX=01



White Aluminum
XX=02

Black Aluminum
XX=04

Acessories option


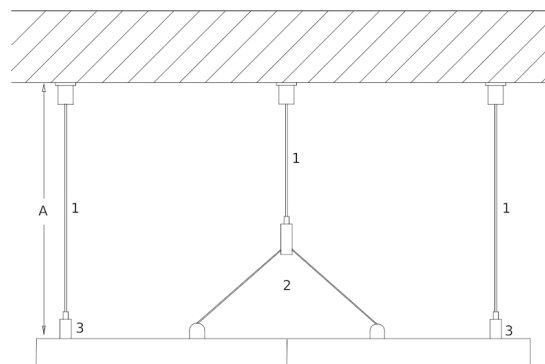
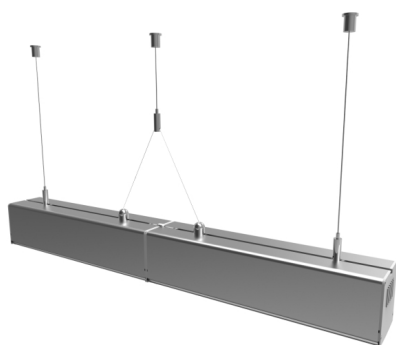


- [1] - Steel Cable Cod: [A] 200cm:8400035143 || [A] 300cm:8400035144
 [2] - Double terminal for steel cable(2xM5/6 with base) Cod:8400035141
 [3] - Terminal(M5/6 with Base) Cod:8400035140

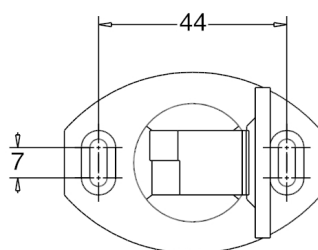

Unit of measurement: mm
 Holder

Cod: Grey:8400037202 White:8400037102 Black:8400037302

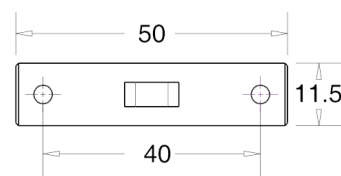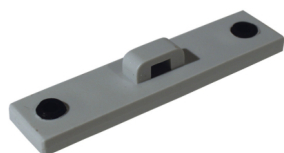

Unit of measurement: mm
 Arex Union

Cod: Grey:8400037205 White:8400037105 Black:8400037305